


LPGS SERIES-HYBRID GEL BATTERY

LPGS12-65 (12V65Ah)

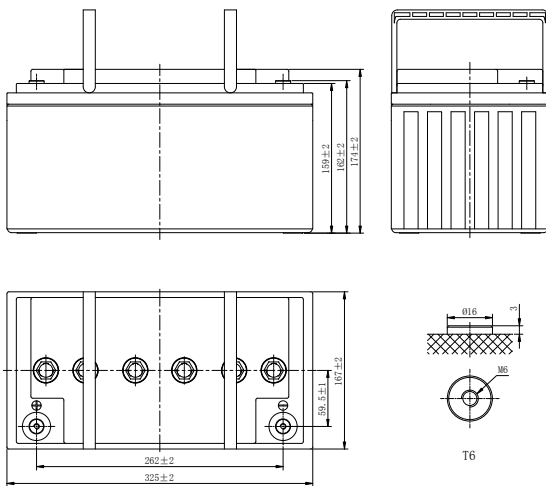

CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Capacity (25°C)	C ₁₀ : 1.80V/cell	65Ah
Dimension	Length	325mm (12.8inches)
	Width	167mm (6.57inches)
	Container Height	174mm (6.85inches)
	Total Height	174mm (6.85inches)
Approx Weight	21.05kg (46.4lbs)	
Terminal	T6(M6)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	1495A	
Internal Resistance (25°C)	Approx 7 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-20~50°C (-4~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.25C	
Charge voltage (25°C)	Standby Use	Cycle Use
	2.25-2.30V/cell	2.35-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	
	-5mV/cell/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	≤3% per month at 25°C (77°F). LPGS series batteries can be stored up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)													
F.V/Time	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	66.2	56.2	45.6	36.3	31.4	19.9	15.3	12.3	10.4	9.00	7.32	6.12	3.27
1.80V/cell	79.8	66.7	53.0	41.2	35.0	21.7	16.5	13.2	11.1	9.63	7.80	6.50	3.45
1.75V/cell	86.4	71.4	55.4	42.8	36.4	22.5	17.0	13.6	11.4	9.84	7.94	6.58	3.48
1.70V/cell	92.9	75.9	58.0	44.3	37.8	23.3	17.6	14.0	11.7	10.1	8.05	6.67	3.52
1.67V/cell	96.6	78.5	59.6	45.2	38.5	23.8	17.8	14.2	11.9	10.2	8.11	6.73	3.55
1.60V/cell	105.8	85.0	63.2	47.4	40.5	24.9	18.6	14.8	12.3	10.6	8.27	6.86	3.62

Constant Power Discharge (Watts/cell) at 25°C (77°F)													
F.V/Time	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	124.4	106.6	87.2	69.9	60.8	38.6	29.8	24.0	20.3	17.7	14.5	12.1	6.48
1.80V/cell	147.8	124.9	100.2	78.6	67.4	41.9	32.1	25.8	21.7	18.9	15.4	12.8	6.82
1.75V/cell	157.9	132.2	103.8	81.0	69.7	43.3	33.0	26.4	22.2	19.2	15.6	13.0	6.88
1.70V/cell	167.2	138.9	107.5	83.4	71.9	44.6	33.8	27.0	22.7	19.7	15.8	13.2	6.95
1.67V/cell	172.4	142.8	109.8	84.6	73.1	45.4	34.2	27.4	23.0	19.9	15.9	13.3	7.01
1.60V/cell	185.0	152.0	114.8	87.8	76.0	47.2	35.6	28.3	23.8	20.5	16.1	13.5	7.13

LPGS SERIES-HYBRID GEL BATTERY

LPGS12-65 (12V65Ah)



APPLICATIONS

- Communication power supply
- Engine starting
- Pump systems
- Alarm installations
- Marine and power stations


GENERAL FEATURES

- 12 years design life (25°C)
- Proven AGM-GEL technology
- Excellent deep discharge recovery and cyclability
- Very low maintenance: no water addition
- Low self-discharge rate


STANDARDS

- IEC60896 Certified
- Classified as "Long Life" according to Eurobat
- UL, CE Approved
- Manufactured in Leoch@IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

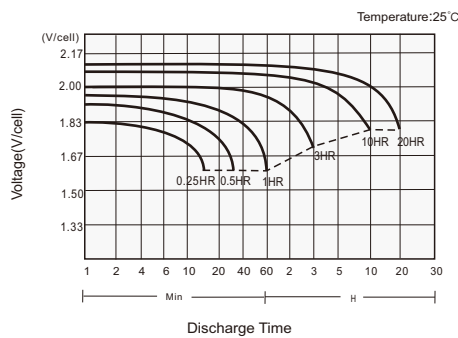

Charging Characteristics

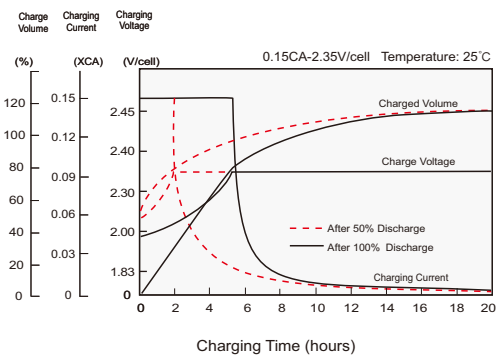

Effects of Temperature on Capacity

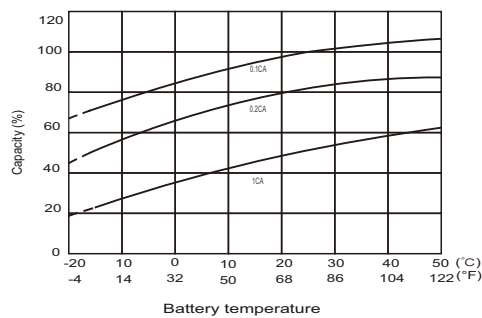

Self Discharge Characteristics

